


Current Sensor

Product Series: STK-616KMF

Part number: STK-616K-20MFB3
STK-616K-30MFB5
STK-616K-40MFB3
STK-616K-40MFB5
STK-616K-65MFB3

Version: Ver 3.0

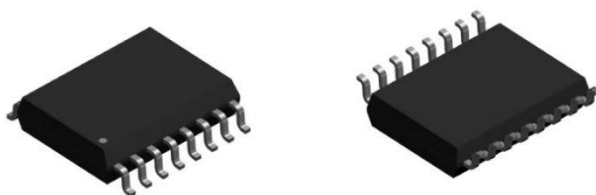

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current.....	4
4.	Electrical data STK-616K-XXMFB3	4
5.	Electrical data STK-616K-XXMFB5	6
6.	Dimension & Pin definitions.....	7
7.	Pin definitions	8
8.	PCB layout recommendation	8
9.	Frequency bandwidth of STK-616K-XXMFBX	9
10.	Step response time of STK-616K-XXMFBX	9
11.	The delay time of Triangular Wave.	10
12.	Typical Application of STK-616KMF	11
13.	Examples of OCD function	11
14.	General information on OCD.....	12
15.	PACKAGE MATERIALS INFORMATION	14

1. Description

The STK-616KM series current sensor is based on TMR (tunnel magneto resistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

- The product is packaged in standard SOIC16 form.
- AEC-Q100, automotive qualified.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 125
Storage temperature	T_stg	°C	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{cc}	V	6
ESD rating (HBM)	U_ESD	kV	4
Junction temperature	T_J	°C	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	3.6	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	10	
Clearance distance (pri. -sec)	d _{Cl}	mm	7.5	Determined by customer's layout
Creepage distance (pri. -sec)	d _{Cp}	mm	7.5	


Measuring current table

Product	Optimized Range I _{pn} (A)	Sensitivity, (mV/A)	V _{cc} (V)	T(°C)
STK-616K-20MFB3-1-1.65-E-1-Z	±20A	66	3.3V	-40 ~ 125
STK-616K-40MFB3-1-1.65-E-2-C	±40A	33	3.3V	-40 ~ 125
STK-616K-40MFB3-1-1.65-E-2-C-2	±40A	33	3.3V	-40 ~ 125
STK-616K-40MFB3-1-1.65-E-1-Z	±40A	33	3.3V	-40 ~ 125
STK-616K-40MFB3-1-1.65-X-X-X	±40A	33	3.3V	-40 ~ 125
STK-616K-40MFB3-1-1.65-E-2-Z	±40A	33	3.3V	-40 ~ 125

STK-616K-65MFB3-1-1.65-E-2-C	±65A	20.3	3.3V	-40 ~ 125
STK-616K-65MFB3-1-1.65-E-1-Z	±65A	20.3	3.3V	-40 ~ 125
STK-616K-65MFB3-1-1.65-E-2-Z	±65A	20.3	3.3V	-40 ~ 125
STK-616K-30MFB5-1-2.5-E-1-Z	±30A	66.6	5V	-40 ~ 125
STK-616K-30MFB5-1-2.5-E-2-Z	±30A	66.6	5V	-40 ~ 125
STK-616K-40MFB5-1-2.5-E-2-Z	±40A	50	5V	-40 ~ 125
STK-616K-65MFB5-1-2.5-E-2-Z	±65A	30.8	5V	-40 ~ 125

2. Part number definition

STK - 616K - 40MF - B - 3 - 1 - 1.65 - E - 1 - C - K

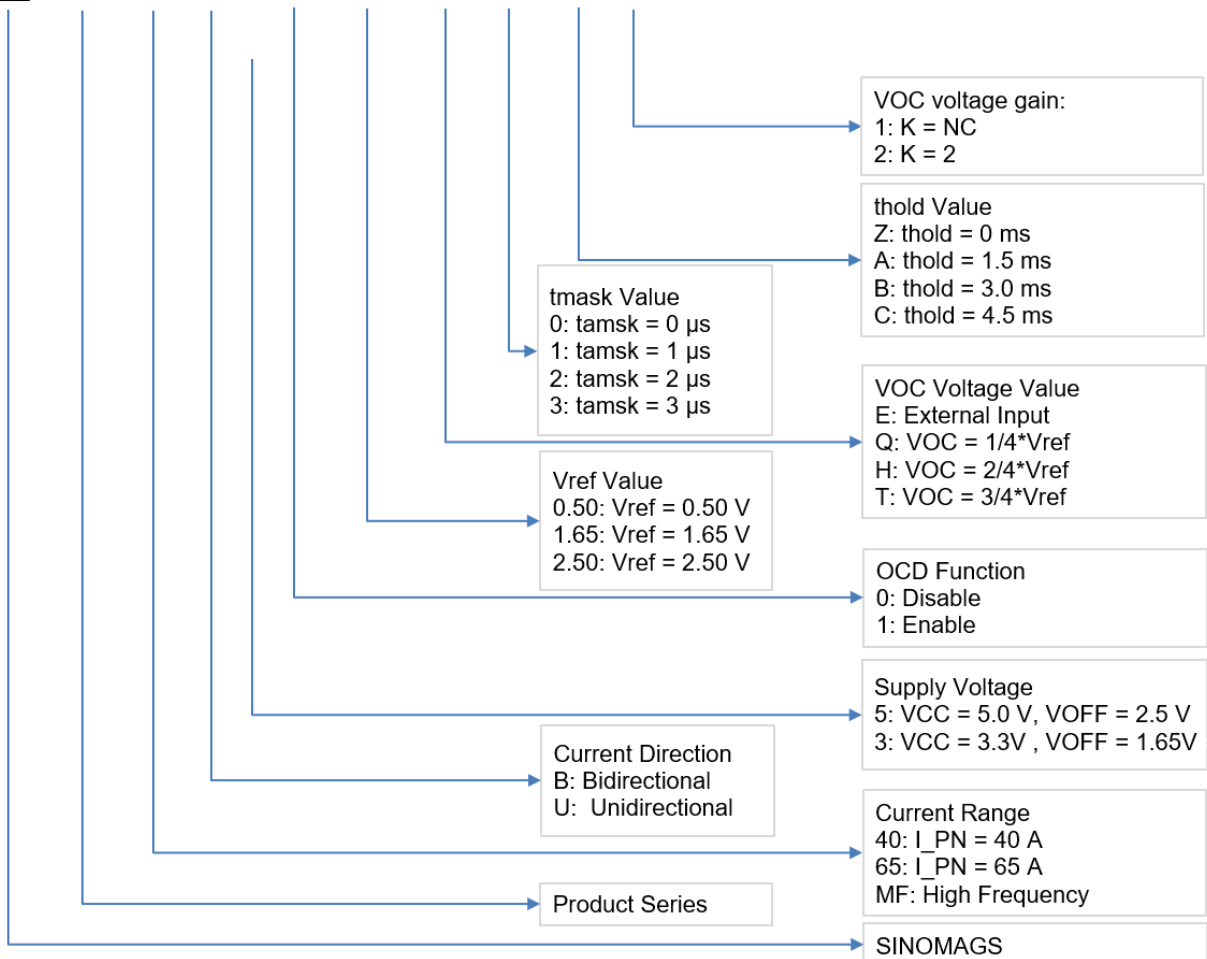

3. Temperature vs Current

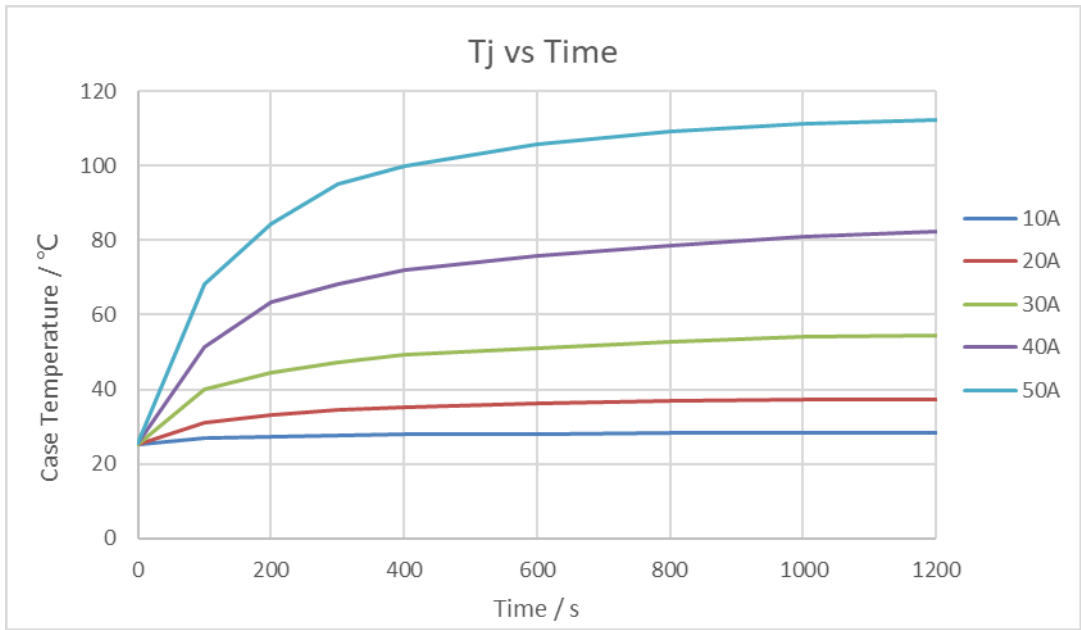


Figure 1. Relationship between STK-616KM Case temperature and amount of input current

Remark 1: Figure 1 shows the results of current & temperature measurement. Tested by using a standard demo test board, with 4 layers of copper conductors, where the thickness for each layer is 2 oz, the total thickness of demo board is 1.6 mm. This result is a reference data. Tc is changed much by the board layout and the heat dissipation. Please confirm it in your evaluation environment.

4. Electrical data STK-616K-XXMFB3

Condition: T_A = 25°C, V_{cc} = 3.3 V

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-20		20	STK-616K-20MFB3
			-40		40	STK-616K-40MFB3
			-65		65	STK-616K-65MFB3
Supply voltage	V _{cc}	V	3.15	3.3	3.45	
Current consumption	I _{cc}	mA		7	12	
Primary Conductor Resistance	R _{IP}	mΩ		0.85		
Quiescent voltage	V _{off}	V	1.6	1.65	1.7	
Internal output resistance	R _{out}	Ω	1		30	
Theoretical gain	G _{th}	mV/A		66		STK-616K-20MFB3
				33		STK-616K-40MFB3
				20.3		STK-616K-65MFB3
OCD function (if applicable)						
OCD range	V _{OC}	V	0.3		1.6	K=1
			0.3		1.6	K=2


FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		1		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Rated linearity error@25°C	Non-L	%I _{pn}		±1.5		±I _{pn}
Accuracy performance						
Delay time	t _{delay}	μs		0.2		@400 kHz
Step response time	t _{res}	μs		0.2		@90% of I _{pn} STK-616K-XXMFB3
Frequency bandwidth	BW	MHz		1.5		@-3dB STK-616K-XXMFB3
Output voltage noise	Vnoise	mVpp		10		@1.4MHz
Accuracy @ 25°C	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	Gain _T	% of G _{th}		±1.5		@ -40~105°C drift related to the value @25°C
Thermal drift of Voff	Voff _T	mV		±15		
Total Accuracy	X_TRange	% of I _{pn}		±3		

5. Electrical data STK-616K-XXMFB5

Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-30		30	STK-616K-30MFB5
			-40		40	STK-616K-40MFB5
Supply voltage	V _{cc}	V	4.5	5	5.5	
Current consumption	I _{cc}	mA		7	12	
Primary Conductor Resistance	R _{IP}	mΩ		0.85		
Quiescent voltage	V _{off}	V	2.45	2.5	2.55	
Internal output resistance	R _{out}	Ω	1		30	
Theoretical gain	G _{th}	mV/A		66.6		STK-616K-30MFB5
				50		STK-616K-40MFB5
OCD function (if applicable)						
OCD range	V _{OC}	V	0.3		3.3	K=1
			0.3		2	K=2
FAULT error		%		5%		% of OCD
OCD Hysteresis	I _{HYS}	%		10%		% of OCD
OCD Fault Mask	t _{mask}	μs		1		0, 1, 2, 3 μs
OCD Fault Mask error	T _{mask_error}	ns		125		
OCD Fault Hold Time	t _{hold}	ms		4.5		0, 1.5, 3, 4.5 ms
Rated linearity error@25℃	Non-L	%I _{pn}		±1.5		±I _{pn}
Accuracy performance						
Delay time	t _{delay}	μs		0.2		@400 kHz
Step response time	t _{res}	μs		0.2		@90% of I _{pn} STK-616K-XXMFB3
Frequency bandwidth	BW	MHz		1.5		@-3dB STK-616K-XXMFB3
Output voltage noise	V _{noise}	mV _{pp}		10		@1.4MHz
Accuracy @ 25℃	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	Gain _T	% of G _{th}		±1.5		@ -40~105℃ drift related to the value @25℃
Thermal drift of V _{off}	V _{off_T}	mV		±15		
Total Accuracy	X _{TRange}	% of I _{pn}		±3		


6. Dimension & Pin definitions

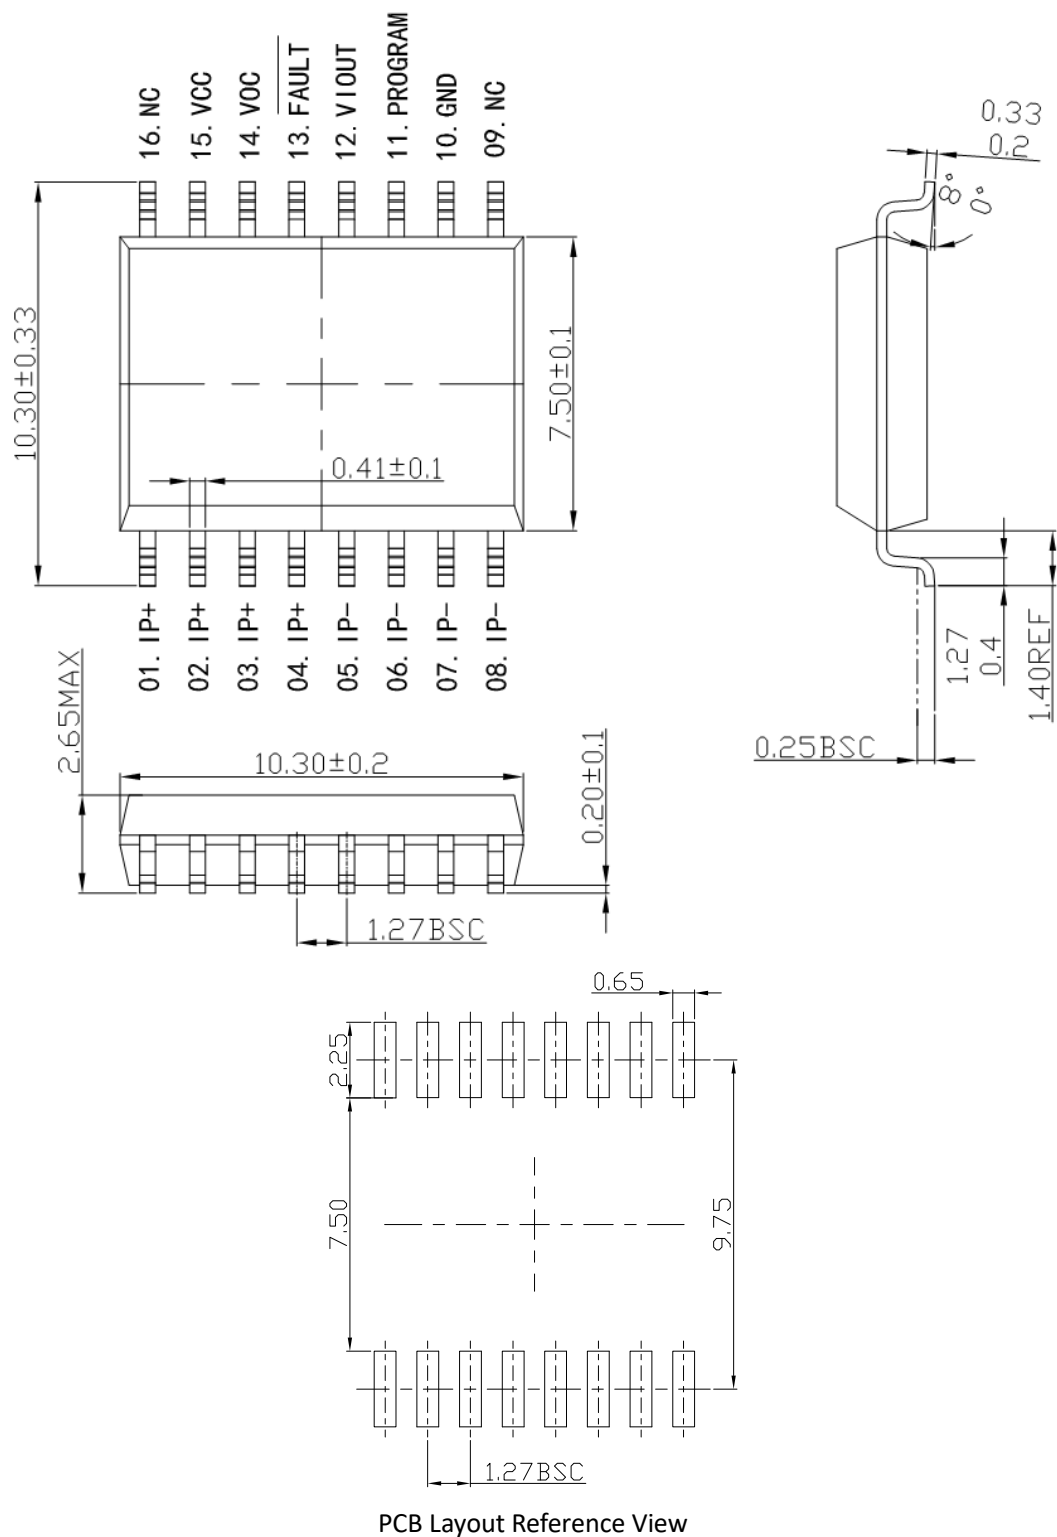


7. Pin definitions

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	NC	Not connected
10	GND	Ground pin (GND)
11	PROGRAM	Internal use only
12	VIOUT	Sensor output pin
13	FAULT	Over current detection alarm output, the pin is open leakage output。 Normally, the output of fault pin is high level
14	VOCD	Over current detection threshold input pin
15	VCC	Power supply pin
16	NC	Not connected


8. PCB layout recommendation

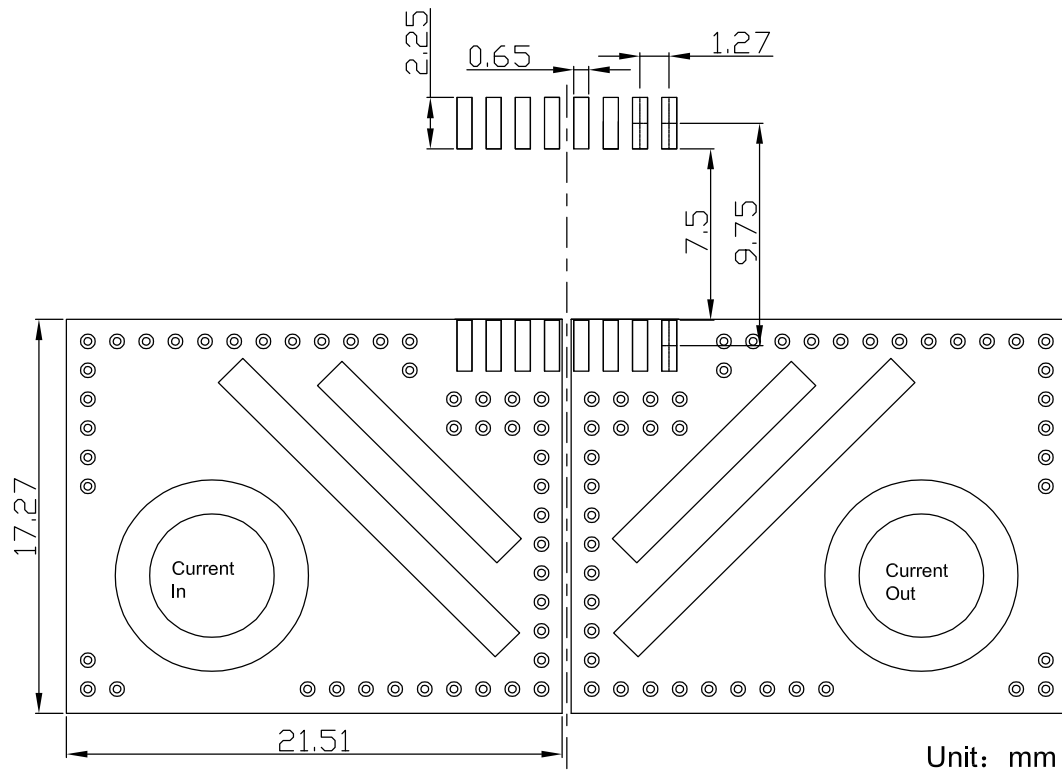

9. Frequency bandwidth of STK-616K-XXMFBX

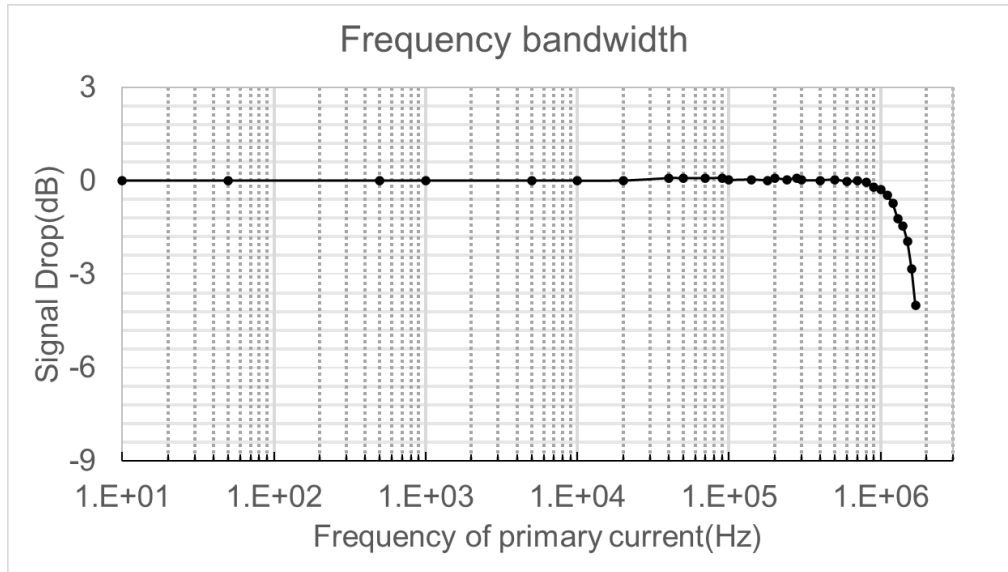


10. Step response time of STK-616K-XXMFBX

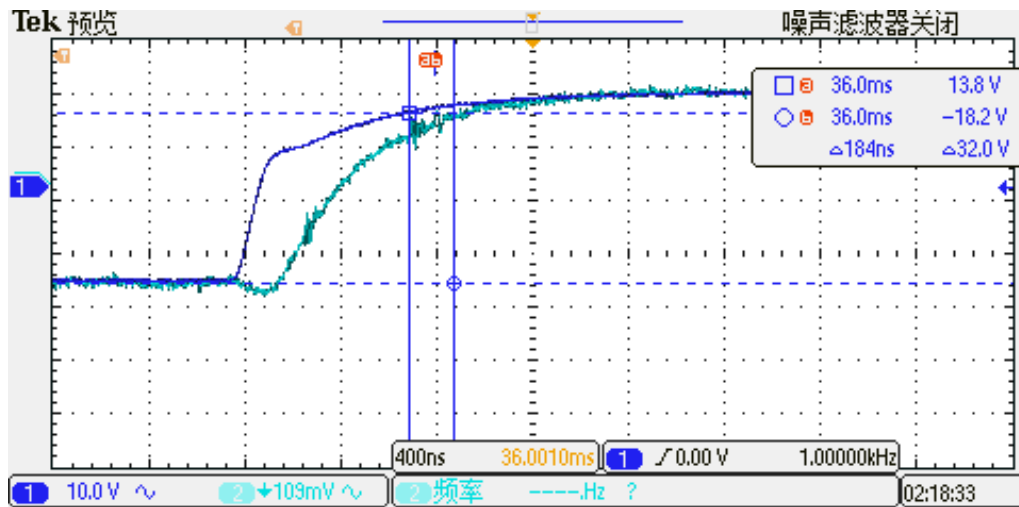


The typical frequency response of STK-616KMF current sensor. The response time from 90% of the primary current to 90% of the secondary output is about 0.2μs.

11. The delay time of Triangular Wave.

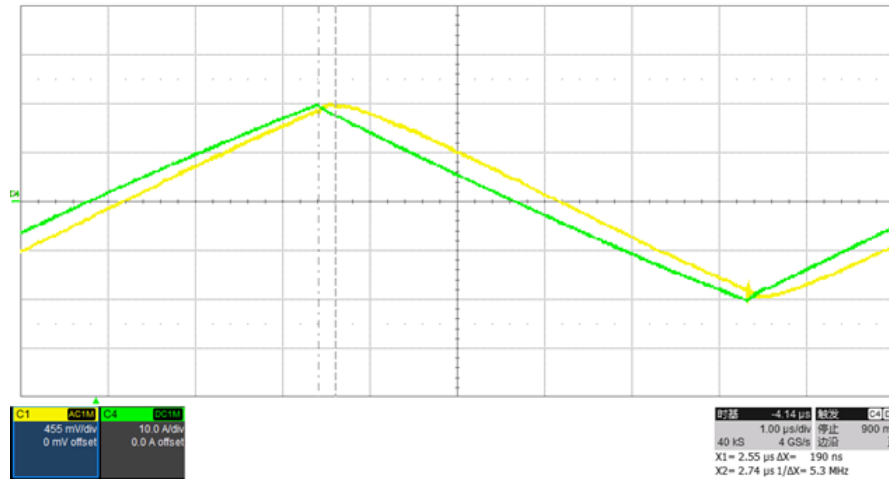

100 kHz Triangular delay---0.2 μ s

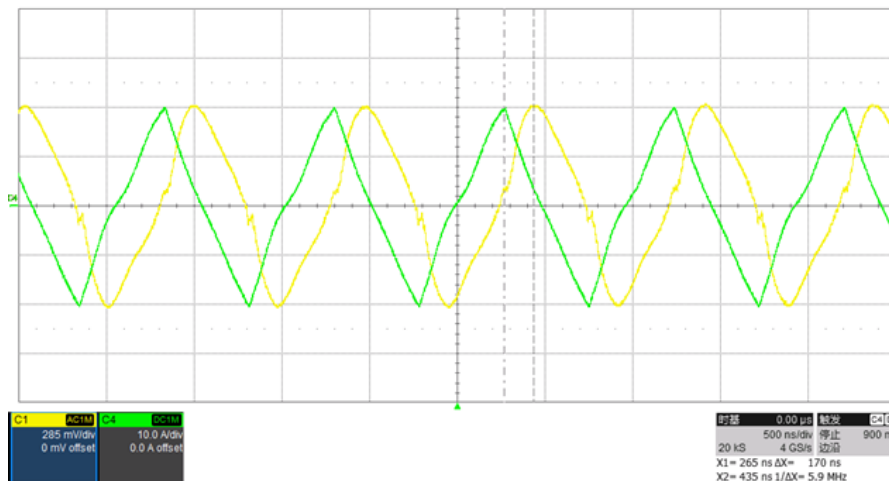


1 MHz Triangular delay---0.2 μ s

14. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}$
 - a) $0.5\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - b) Trigger voltage = $V_{ref} \pm V_{OC}$;
 - c) Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$;
- b) $V_{ref} = 1.65\text{ V}$
 - a) $0.3\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - b) Trigger voltage = $V_{ref} \pm V_{OC}$;
 - c) Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5\text{ V}$
 - a) $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V}$;
 - b) Trigger voltage = $V_{ref} + 8 \cdot V_{OC}$;
 - c) Trigger current = $(V_{ref} + V_{OC} - V_{off}) / G_{th}$


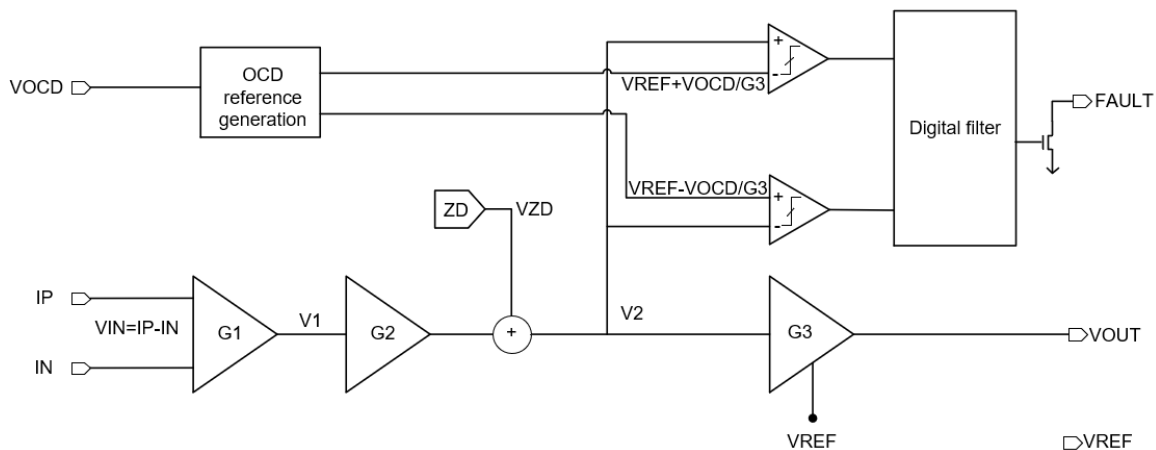


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

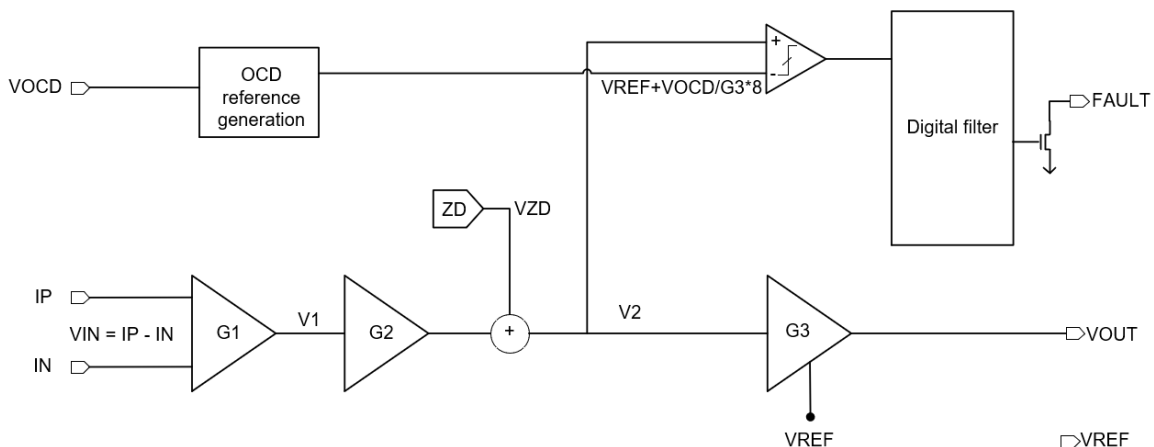

Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

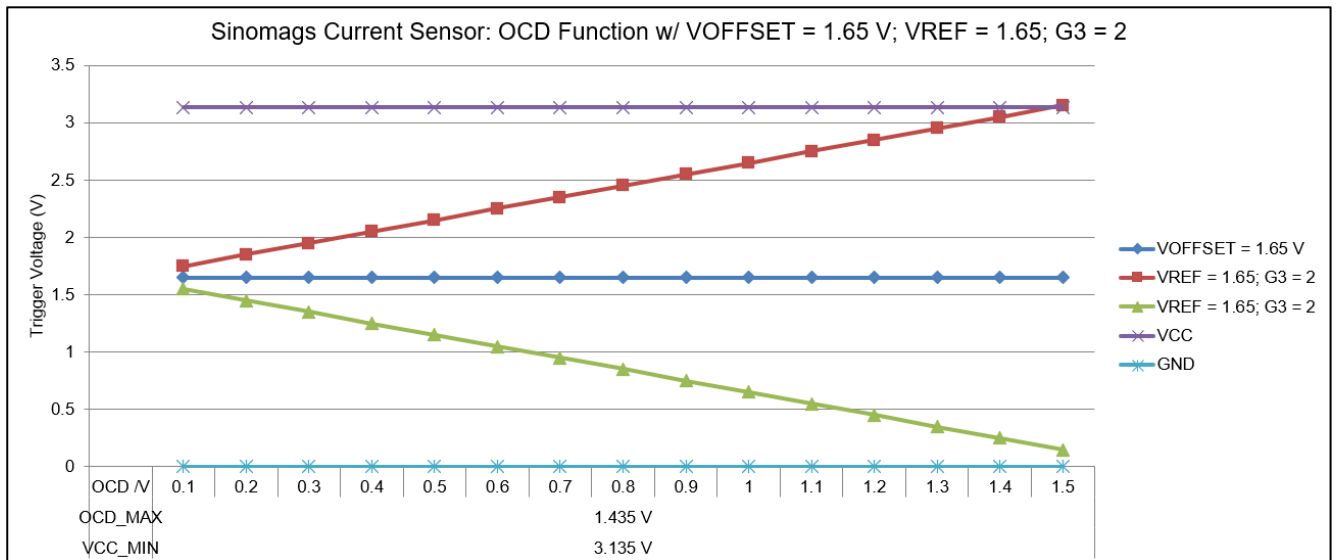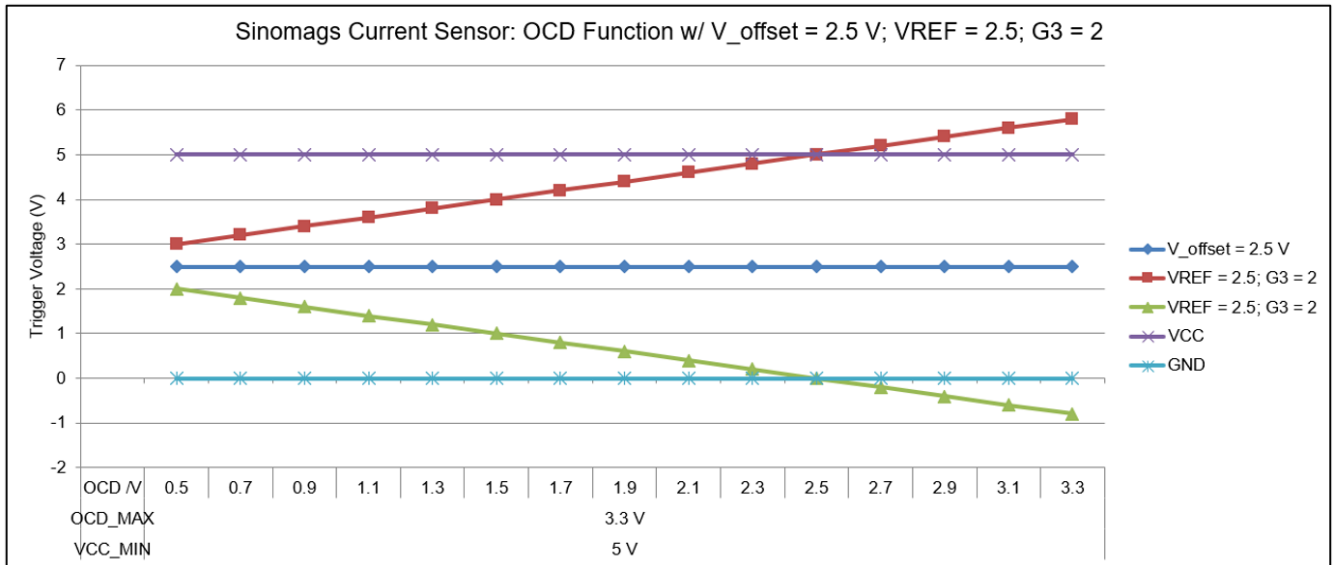

15.PACKAGE MATERIALS INFORMATION

