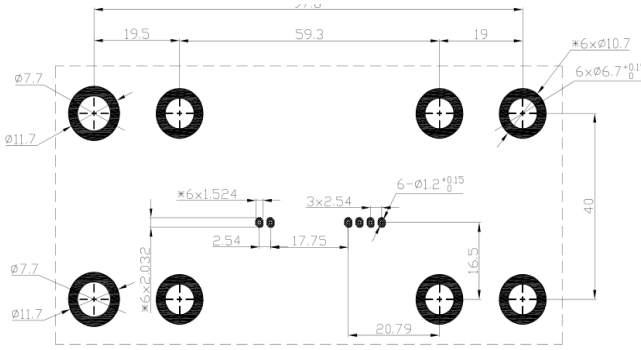
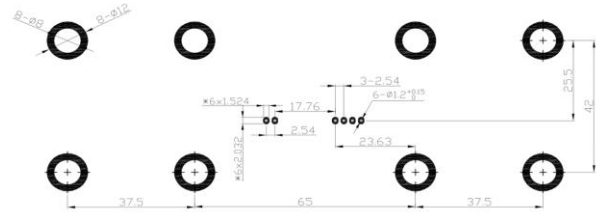


电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85 ℃)	过电流能力 (A@T _{Amax} =105 ℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
SFG-x. xP/P1	三相三线	6*Φ6	185	150	9.4	12.4	
SFG-x. xP/P2	三相三线	6*Φ2.8	>42	42	9	9	
SFG-x. xP/N	穿孔	n/a	n/a	n/a	11	11	

电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85 ℃)	过电流能力 (A@T _{Amax} =105 ℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
SFG-X. XP/N1	穿孔	n/a	n/a	n/a	11	11	2-0.8X1.6 Welding fixed foot 6-0.64X0.64 4-2.54 33.8
SFG-X. XP/P3	三相三线	6*Φ8	300	220	11	12	6-Φ9 6-Φ13 6-Φ12^{+0.15}/₀ 17.76 2.54 8.87 17.5 40 60 60 6x2.032 6x1.524
SFG-X. XP/P4	三相三线	6*Φ7.5	250	220	11	12.1	6-Φ12.5 6-Φ8.5^{+0.15}/₀ 6-Φ12^{+0.15}/₀ 17.5 2.54 3x2.54 12.1 17.25 41.5 60 8.87 8.87 6x2.032 6x1.524

电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85 ℃)	过电流能力 (A@T _{Amax} =105 ℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
SFG-X. XP/L3	三相三线	6*Φ9.5	400	370	11.5	13.3	
SFG-x. xP/S1	三相四线	8*Φ4.5	>80	80	4	4	
SFG-x. xP/S2	三相四线	8*Φ2.3	>32	32	5.3	5.3	


电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85 ℃)	过电流能力 (@T _{Amax} =105 ℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
SFG-x. xP/S3	三相三线	6*Φ2.8	>42	42	9	9	
STK-x. xP/M1-x	单相两线	4*Φ4	>60	60	5.6	8	
STK-x. xP/M1S-x	单相两线	4*Φ1.8	>20	20	2.3	2.3	


电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85 ℃)	过电流能力 (@T _{Amax} =105 ℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
STK-x. xP/MN-x	穿孔	n/a	n/a	n/a	>11	>11	 Top side view
SFG-X. XP/PF	三相四线	6*Φ6+2* Φ7	>185	>150	8	12	
SFG-X. XP/L2	三相四线	8*Φ7	>230	>205	12	12	

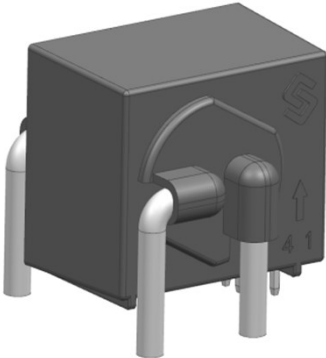
电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85℃)	过电流能力 (A@T _{Amax} =105℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
SFG-x. xP/S4	三相三线	6*Φ6	>150	150	11	12.9	
SFG-x. xP/S5	三相三线	6*Φ4.5	>80	80	10	10	
STK-x. xP/M3	三相三线	6*Φ3	>45	45	5.2	7.63	

电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85℃)	过电流能力 (@T _{Amax} =105℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
STK-x. xP/M4	三相四线	8*Φ3	>45	45	4.3	5	
STK-x. xP/M5	三相三线	6*Φ3.5	>62	62	4.5	6.25	
STK-X. XP/P1	单相两线	4*Φ4	>60	60	待定	待定	

电流传感器料号	型式	导流线直径 (mm)	过电流能力 (@T _{Amax} =85℃)	过电流能力 (A@T _{Amax} =105℃)	最小安规电气 间隙 (mm)	最小安规爬电 距离 (mm)	示意图
STK-1.0P/M2-1	单相两线	4*Φ4	>60	60	5.6	8	
STK-1.0P/M2S-1	单相两线	4*Φ1.8	>20	20	2.3	2.3	

Series	Structure	Pri. Style	线径 (mm)	Number of Pri.	Item No.	Measuring range(A)	Nominal differential current	Standard
SFG-CPL/A		Primary conductor	2.8	4	SFG-0.3CPL/A	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/A-B	0.3	5mA AC	UL2231 CCID5
SFG-CPL/A2		Pass through opening	n/a	-	SFG-0.3CPL/A2	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/A2-A	0.3	6mA DC	IEC 62955
					SFG-0.3CPL/A2-C	0.3	20mA AC	UL2231 CCID20
SFG-CPL/A3		Pass through opening	n/a	-	SFG-0.3CPL/A3	0.3	6mA DC 30mA AC	IEC 62752 IEC62955

Series	Structure	Pri. Style	线径 (mm)	Number of Pri.	Item No.	Measuring range(A)	Nominal differential current	Standard
SFG-CPL/A4		Primary conductor	1.8	2	SFG-0.3CPL/A4	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
SFG-CPL/A5		Pass through opening	n/a	-	SFG-0.3CPL/A5	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/A5-C	0.3	20mA AC	UL2231 CCID20
SFG-CPL/A6		Pass through opening	n/a	-	SFG-0.3CPL/A6	0.3	6mA DC 30mA AC	IEC 62752 IEC62955

Series	Structure	Pri. Style	线径 (mm)	Number of Pri.	Item No.	Measuring range(A)	Nominal differential current	Standard
SFG-CPL/A7		Primary conductor		4	SFG-0.3CPL/A7	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
SFG-CPL/A8		Primary conductor	2.8	2	SFG-0.3CPL/A8	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/A8-C	0.3	20mA AC	UL2231 CCID20
SFG-CPL/A9		Primary conductor		2	SFG-0.3CPL/A9	0.3	6mA DC 30mA AC	IEC 62752 IEC62955

Series	Structure	Pri. Style	线径 (mm)	Number of Pri.	Item No.	Measuring range(A)	Nominal differential current	Standard
SFG-CPL/B		Primary conductor	2.5	4	SFG-0.3CPL/B	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/B-A	0.3	6mA DC 20mA AC	IEC62752 UL2231
					SFG-0.3CPL/B-B	0.3	5mA AC 20mA AC	UL2231 CCID5 UL2231
					SFG-0.3CPL/B-D	0.3	6mA DC	IEC62955
SFG-CPL/B1		Pass through opening	n/a	-	SFG-0.3CPL/B1	0.3	6mA DC 30mA AC	IEC 62752 IEC62955
					SFG-0.3CPL/B1-C	0.3	20mA AC 20mA AC	UL2231 CCID20